


ГОСТ 28759.8-90

Конструкция и размеры прокладок восьмиугольного сечения должны соответствовать чертежу и табл. 1

Размеры прокладок восьмиугольного сечения.

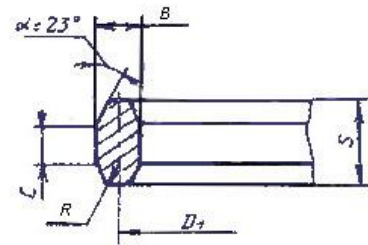

Внутренний диаметр аппарата, D	D_1	B	S	C	R	Давление условное, МПа	Масса, кг
400	430	12	16	7	1,6	6,3	2,00
	475					8,0	2,05
						10,0	
450	510	12	16	7		6,3	2,20
	525	14	18	8		8,0	3,00
		22	26	10		10,0	
500	560	12	16	7	6,3	2,40	
	575	16	20	8	8,0	4,10	
		24	30	12	24		16,0
600	685	14	18	8	1,6	6,3	4,00
	675	18	23		8,0	6,10	
		26	32	13	2,4		16,0
700	785	14	18	8	1,6	6,3	4,50
	775	20	25	9		8,0	
		790	32	38	16	2,4	10,0
800	890	18	23	8	1,6	6,3	8,10
	875	22	26	10		8,0	
		910	36	42	16	2,4	10,0
900	1025	18	23	8	1,6	6,3	9,30
	990	26	32	13	2,4	8,0	
		1015	40	48		18	10,0
1000	1070	22	26	10	1,6	6,3	14,30
	1090	28	34	14	2,4	8,0	
		1120	42	50		18	10,0
1100	1170	22	26	10	1,6	6,3	15,60
	11,90	30	36	15	2,4	8,0	
		1235	46	54		18	10,0
1200	1280	24	30	12	1,6	6,3	21,50
	1290	32	38	16		8,0	
		1350	50	58	20	10,0	35,40
1300	1365	24	30	12	2,4	6,3	23,10
	1400	36	42	16		8,0	
		1460	27	34	14	10,0	47,25
1400	1500	38	44	16	1,6	6,3	55,65
		1600	30	36		15	
	1610	42	50	18	10,0	86,30	
1500	1600	30	36	15	2,4	6,3	48,60
	1610	42	50	18		8,0	
		1705	30	36	15	10,0	74,75
1600	1710	42	50	18	1,6	6,3	43,50
		8,0					
	10,0	79,40					