


ОСТ 26.260.461-99

Тип 1 – овального сечения (рисунок 1, таблица 1);

Рисунок 1

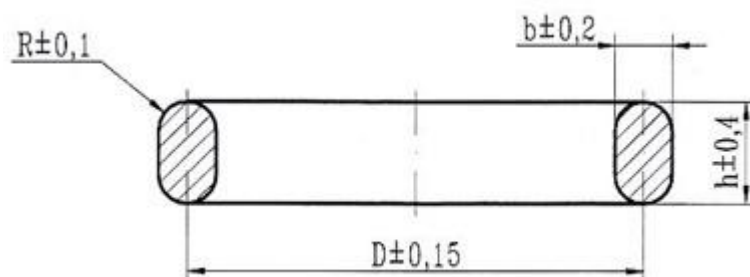

Тип 1

Размеры прокладок овального сечения (мм) по ОСТ 26.260.461-99 (табл.1)

Проход условный фланца Ду	Давление условное Ру, МПа	D	b	h	R	Масса, кг			
15	6,3; 10,0; 16,0	35	8	14	4,0	0,085			
20		45				0,109			
25		50				0,121			
32		65				0,157			
40		75				0,182			
50	6,3; 10,0	85	11	18	5,5	0,363			
	16,0	95				0,406			
65	6,3; 10,0; 16,0	110				0,470			
80	6,3; 10,0	115				0,491			
	16,0	130				0,551			
100	6,3; 10,0	145				0,619			
	16,0					0,683			
125	6,3; 10,0	175				0,747			
	16,0	190				0,811			
150	6,3; 10,0	205				13	20	6,5	0,845
	16,0								1,13
200	6,3; 10,0	265	11	18	5,5				
	16,0	275	16	22	8,0	2,02			
250	6,3; 10,0	320	11	18	5,5	1,37			
	16,0	330	16	22	8,0	2,42			
300	6,3; 10,0	375	11	18	5,5	1,60			
	16,0	380	22	30	11	4,85			
350	6,3	420	11	18	5,5	1,79			
	10,0		16	22	8,0	3,08			
	16,0		22	30	11	5,35			
400	6,3	480	11	18	5,5	2,05			
	10,0		16	22	8,0	3,52			
	16,0		22	30	11	6,12			